



Wall-Mount Power Supply Model 2100-0300

**... delivering
quality
time after time**




The 2100-0300 48Vdc, 0.5A Wall-mount Power Supply, is an economical compact power source for Pulsecom 03D3 CPE mountings or other light-duty telephone application. The 2100-0300 is equipped with a 6-foot AC power cord that plugs into a standard 3-prong AC wall outlet. Output connections are made from the power supply to the mounting assembly via the attached 6-foot, 3-conductor power cord.

Features

- Occupies a single outlet position in a standard AC duplex wall or floor 3-prong grounded AC outlet.
- -48Vdc, 0.5A output.
- Output is regulated and protected against short circuits.
- UL Listed.
- Suitable to power up to 3 03D3 circuit packs.
- Simple to install wall mount bracket.

Application

2100-0300 Wiring Diagram

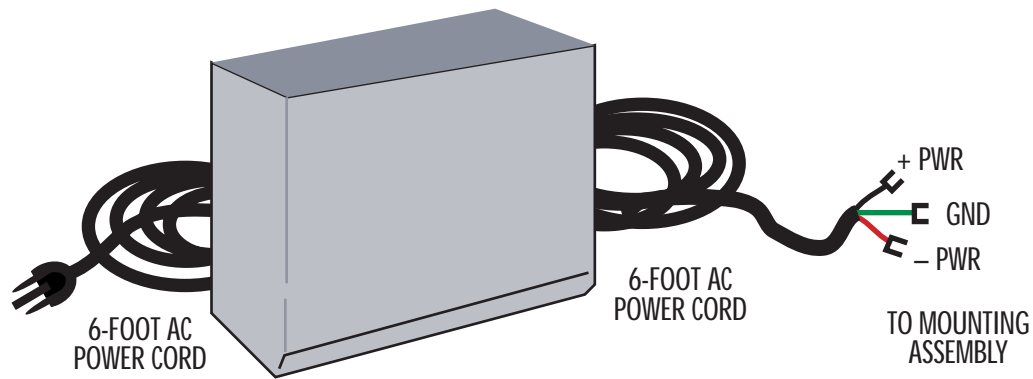

Specification

Input:
120Vac @ 60Hz (standard AC receptacle)

Output:
48Vdc, 0.5A

Operating Environment:
32° to 122°F (0° to 50°C);
Humidity, 0 to 95%, no condensation

Dimensions:
Height, 4.2"; Width, 2.6"; Depth, 1.46"

Weight:
Approximately 10 oz.

Ordering Information

MODEL	DESCRIPTION
2100-0300	-48Vdc, 0.5A Wall-Mount Power Supply
203D3-RT	2 Position Wall Mounted Shelf
303D3-CPL2	3 Position Wall Mounted Shelf with locking cover
303D3-CPL4	3 Position Wall Mounted Shelf with locking cover for switch to protect applications

PULSECOM

Pulse Communications, Inc.
2900 Towerview Road • Herndon, Virginia 20171 USA

Headquarters: (703) 471-2900
Customer Service: (800) 381-1997 or (703) 471-2950
Technical Support: (800) 841-1005 or (703) 478-7077
Literature Request: (800) 699-6006 or (703) 478-7049
www.pulse.com • Fax 703-471-2951

Pulsecom is a registered trademark of Hubbell Incorporated. Other brand and product/trade names may be trademarks or registered trademarks of their respective owners. Information contained in this publication is subject to change without notice.

Printed in USA

